Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Composite Data, Audio, Video, Security and Control Cable

Banana Peel™ Jacketless Cables
Category 5e

Jameco Part Number 234162 (7913S-000-1000)

Description	Part No.	UL NEC/ C(UL) CEC Type	Standard Lengths		Standard Unit Weight		Overall Nom. OD		Component Descriptions	Shielding Materials & Nom. DCR	Insulation Material & Color Code	Component Jacket Material & Colors	Component Nom. OD	
			Ft.	m	Lbs.	kg	Inch	mm					Inch	mm
Composite • (2) Cat 5e 4-Pair UTP 24 AWG **• (2) Series 6 Coax** w/ Duobond® IV* Quad Shield														
Polyolefin Insulation (Pairs) **• Gas-injected FPE Insulation** (Coax) **• F-R PVC Jackets • No Overall Jacket**														
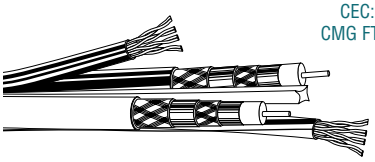	**7913S** new	NEC: CMR CEC: CMG FT4	500 1000	152.4 304.8	67.0 134.0	30.4 60.8	.600	15.24	(2) 4-Pair UTP Data Cables: 24 AWG (solid) Bare Copper Cond.	None	Polyolefin (see chart below)	F-R PVC (1) Blue (1) Green	.200	5.08
									(2) Coax: Series 6 18 AWG (solid) Bare Copper Cond.	Duobond IV Quad Shield: 60% & 40% AL Braids 4.8Ω/M′ 15.7Ω/km	Gas-injected Foam Polyethylene	F-R PVC (1) Black (1) White	.298	7.57
Coax sweep tested to 2.25 GHz and jacket sequentially marked. Third party verified to TIA/EIA-568-B.2, Category 5e														
Composite • (2) Cat 5e 4-Pair UTP 24 AWG **• (2) Series 6 Coax** w/ Duobond IV* Quad Shield **• (1) 2-Fiber LANLite®**														
Polyolefin Insulation (Pairs) **• Gas-injected FPE Insulation** (Coax) **• F-R PVC Jackets • No Overall Jacket**														
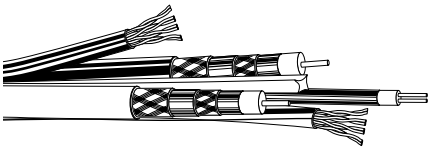	**7914S** new	NEC: CMR OF CEC: CMG OF FT4	500 1000	152.4 304.8	76.0 151.0	34.2 68.5	.620	15.75	(2) 4-Pair UTP Data Cables: 24 AWG (solid) Bare Copper Cond.	None	Polyolefin (see chart below)	F-R PVC (1) Blue (1) Green	.200	5.08
									(2) Coax: Series 6 18 AWG (solid) Bare Copper Cond.	Duobond IV Quad Shield: 60% & 40% AL Braids 4.8Ω/M′ 15.7Ω/km	Gas-injected Foam Polyethylene	F-R PVC (1) Black (1) White	.298	7.57
									(1) 2-Fiber LANLite: Gigabit Ethernet 62.5µ/125µ/900µ (core/clad/coating) Tight Buffered	—	PVC (1) Blue (1) Orange	F-R PVC (1) Orange	.175	4.45
Coax sweep tested to 2.25 GHz and jacket sequentially marked. Third party verified to TIA/EIA-568-B.2, Category 5e														

AL = Aluminum • DCR = DC Resistance • FPE = Foam Polyethylene • F-R = Flame-retardant • UTP = Unshielded Twisted Pair

Contact the Belden Customer Service Department for a Comprehensive Connector Cross Reference: **1-800-BELDEN-1**.
Request quotations of cables not listed.

*Duobond IV = Duobond II + 60% aluminum braid + Duofoil® + 40% aluminum braid.

Color Codes: Cat 5e UTP

Pair No.	Color Combination
1	White/Blue Stripe & Blue
2	White/Orange Stripe & Orange
3	White/Green Stripe & Green
4	White/Brown Stripe & Brown